



Sun Control Window Films


Performance Results:

Visible Light Transmitted	15%
Total Solar Energy Rejected	75%
UV Light Rejected	99%
Glare Reduction	83%
Visible Light Reflected Interior	19%
Visible Light Reflected Exterior	43%
Solar Heat Reduction	69%



Night Vision 15

*Enhancing light
as only 3M can*

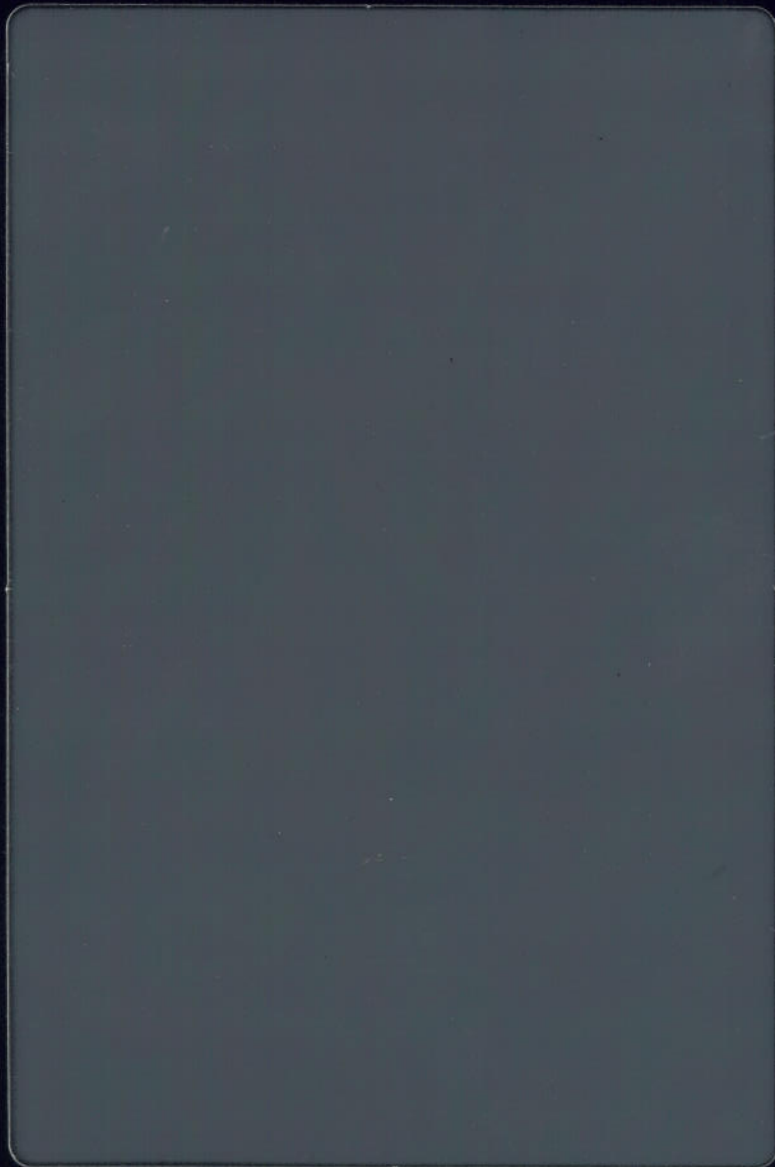

Night Vision 15 Benefits:

- Great heat rejection provides energy savings and improved comfort
- A warm natural hue invites warmth and beauty to any room
- Extends the life of furnishings by significantly reducing UV rays, the largest cause of fading
- Low interior and exterior reflectivity, especially at night!
- New 3M nano-technology enhances color stability
- Reduces glare and eye discomfort
- Comprehensive 3M manufacturer's warranty
- Increases personal safety from flying glass
- Superior scratch resistant coating



The Skin Cancer Foundation recommends this 3M Window Film product as an effective UV protectant.

Performance data generated for a typical film on 6mm glass using applicable industry test methods and standards.

Night Vision 15

*Enhancing light
as only 3M can*




Glass Type (All 1/4")	Single Pane Clear	Single Pane Tinted	Double Pane Clear	Double Pane Tinted
Visible Light Transmitted	15%	9%	14%	9%
Total Solar Energy Rejected	75%	71%	63%	71%
UV Light Rejected	99%	99%	99%	99%
Glare Reduction	83%	82%	82%	80%
Visible Light Reflected Int.	19%	19%	20%	20%
Visible Light Reflected Ext.	43%	16%	44%	20%
Shading Coefficient	0.29	0.33	0.42	0.33
Emissivity	0.70	0.70	0.70	0.70
U Value	1.04	1.04	0.47	0.47
Solar Heat Reduction	69%	52%	48%	40%



Building and Commercial Services Division

3M Center, Building 223-2S-24
St. Paul, MN 55144-1000

Printed in U.S.A. © 3M 2007 70-0709-0161-9 (173.5)ii

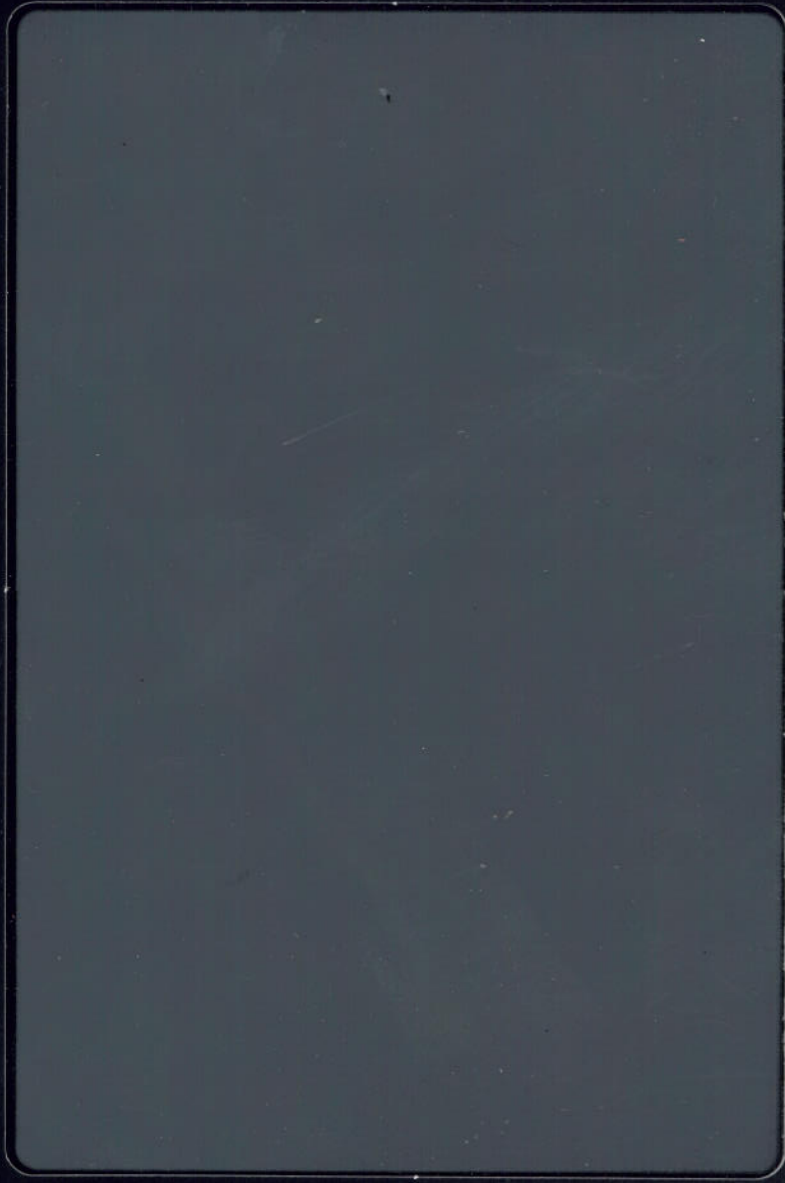

No UV Protection or Abrasion Coating has been applied to this sample card.