

PRESTIGE SERIES

PR 60

CLEARLY SUPERIOR



*prestige
window films*



Glass Type (All 1/4")	Single Pane Clear	Single Pane Tinted	Double Pane Clear	Double Pane Tinted
Visible Light Transmitted	61%	36%	54%	32%
Total Solar Energy Rejected — On Angle	52%	58%	45%	59%
Infrared Rejected	97%	97%	97%	97%
Visible Light Reflected Int.	8%	7%	11%	10%
Visible Light Reflected Ext.	8%	6%	15%	8%
UV Rejected	99.9%	99.9%	99.9%	99.9%
Glare Reduction	31%	32%	32%	32%
Shading Coefficient	0.55	0.48	0.63	0.47
Emissivity	0.78	0.78	0.78	0.78
U Value	0.99	0.99	0.47	0.47
Luminous Efficacy	1.11	0.75	0.86	0.68



INDUSTRY
PARTNER



Building and Commercial Services Division


3M Center, Building 223-2N-21
St. Paul, MN 55144-1000

© 3M 2008 70-0709-0159-3 (382)ii

3M

Sun Control Window Films


*prestige
window films*

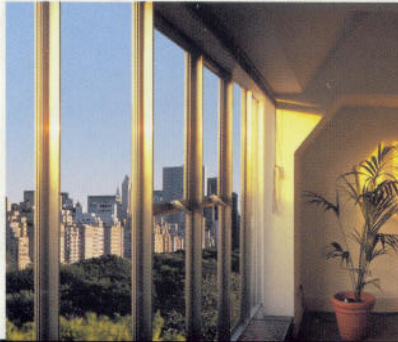

PRESTIGE SERIES

PR 60

CLEARLY SUPERIOR



PR 60 Benefits:

- Substantial heat rejection provides energy savings and enhanced comfort, combined with a clear film
- Increased on-angle heat rejection provides additional performance benefits
- Low reflection enhances views and overall beauty
- No metals; 3M technology provides superior performance with no corrosion or interference with cell phone signals
- Extends the life of furnishings by rejecting UV rays, the single largest component of fading
- Premium 3M manufacturer's warranty
- Reduces glare and eye discomfort
- Increases personal safety by minimizing flying glass

Performance Results:

Visible Light Transmitted	61%
Total Solar Energy Rejected	52%
— On Angle	61%
Infrared Rejected	97%
Visible Light Reflected Int.	8%
Visible Light Reflected Ext.	8%
UV Rejected	99.9%
Glare Reduction	31%
Luminous Efficacy	1.11

Performance data generated for a typical film on 6mm glass using applicable industry test methods and standards. Infrared rejection measured from 900nm–1000nm.



The Skin Cancer Foundation recommends this 3M Window Film product as an effective UV protectant.